

# REC series wall washers

## ELECTRICAL

- Voltage: AC100~240V; 50/60Hz
- Power consumption: 34W
- CE

## SOURCE & OPTICS

- Light Source: 28pcs (10R, 9G, 9B) LEDs
- Drive Current: 350mA
- Beam Angle: 15°, 30°, 60°
- Lumen: 900lm

## FEATURE & CONTROL



- External Setting: DMX Coder
- Operation: DMX512 / Static
- Power connection: 3 core in/out cable
- Data connection: 5 core in/out cable

## PHYSICAL

- Housing: Die-cast aluminium
- Dimensions: 283x87x235mm
- Weight: 4 kg



## ENVIRONMENT

- IP rating: IP67
- Operation Temperature: -40°C/-50°C

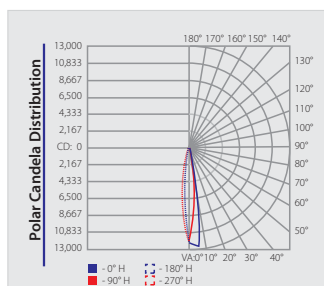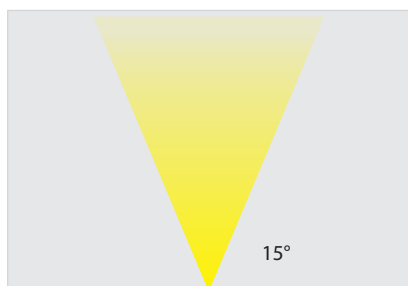

Illuminance at a Distance	Center Beam LUX		Field Width	
	Center Beam LUX	Field Width	Field Width	Field Width
3.3m	1,110.25 LUX	1.4m	1.5m	
6.7m	275.06 LUX	2.9m	3.0m	
10.0m	122.25 LUX	4.3m	4.4m	
13.3m	68.77 LUX	5.7m	5.9m	
16.7m	44.01 LUX	7.2m	7.4m	
20.0m	30.56 LUX	8.6m	8.9m	

Vert. Spread: 24.3° Horiz. Spread: 25.0°

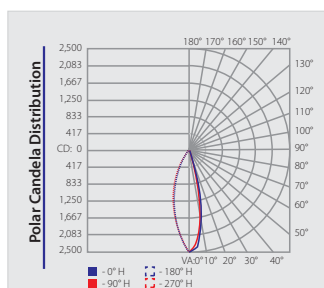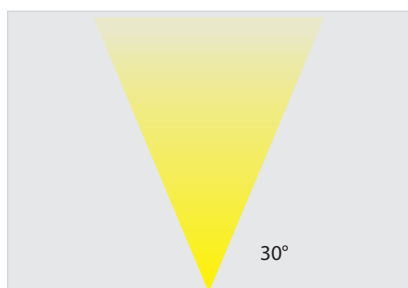

Illuminance at a Distance	Center Beam LUX		Field Width	
	Center Beam LUX	Field Width	Field Width	Field Width
3.3m	221.46 LUX	3.3m	3.3m	
6.7m	55.37 LUX	6.5m	6.7m	
10.0m	24.61 LUX	9.8m	10.0m	
13.3m	13.84 LUX	13.1m	13.3m	
16.7m	8.86 LUX	16.3m	16.6m	
20.0m	6.15 LUX	19.6m	20.0m	

Vert. Spread: 52.2° Horiz. Spread: 53.1°

